





Assembly instructions



1 Base structure

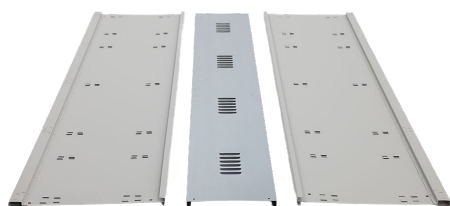

Position the rear section and both sides of the locker on the floor.

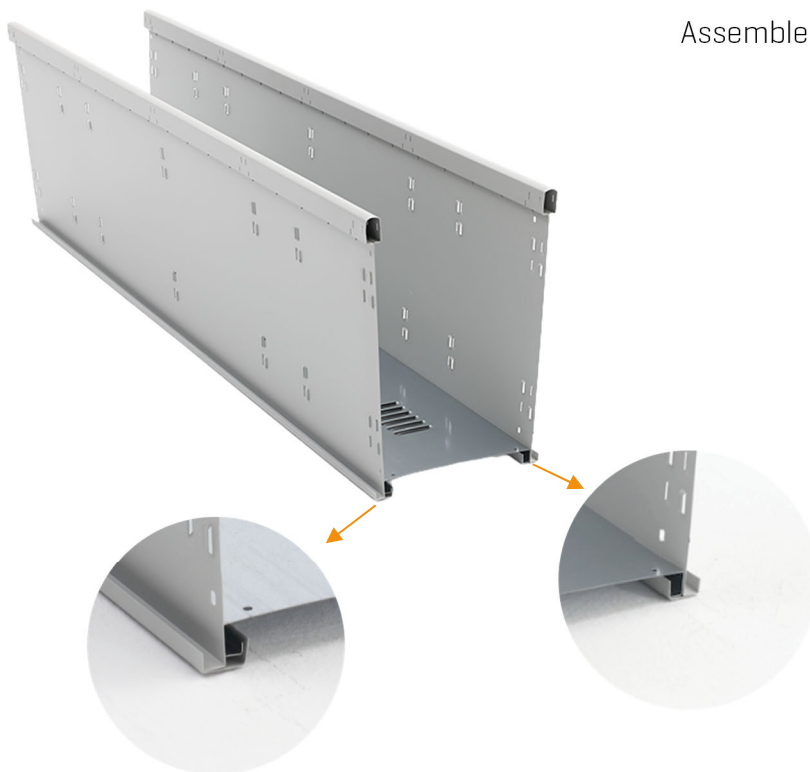


Assemble both sides with the rear section.

2 Enclosure racks



Fit the bottom and top rack to achieve a more stable structure.

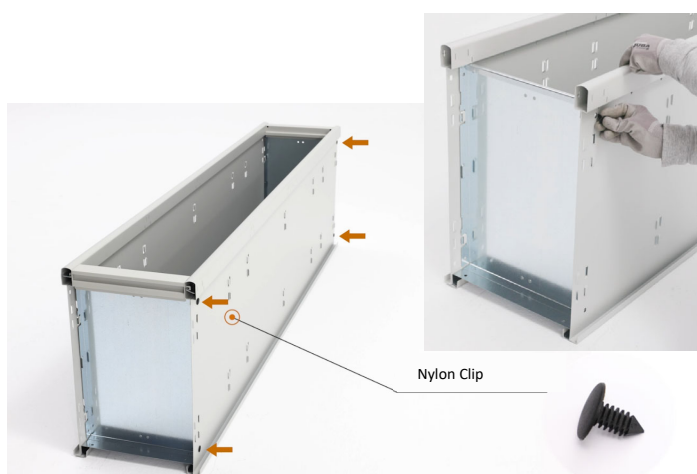

Fit the nylon clips on one side of each rack.

The nylon clips for the other side are fitted once the bottom and top frame pieces are in place, as indicated in the next step [3], in order to make assembly easier.

3 Top and bottom frame piece



Fit the bottom and top frame pieces and fix them using the fork clips.



First the bottom frame.



The procedure is the same for fitting the top frame.

[Fit the side nylon clips as indicated in the previous step]




Join each frame piece to both sides by means of the fork clips.

Use a wooden or rubber hammer for secure fixing.



4 Lower tray with hanger rail

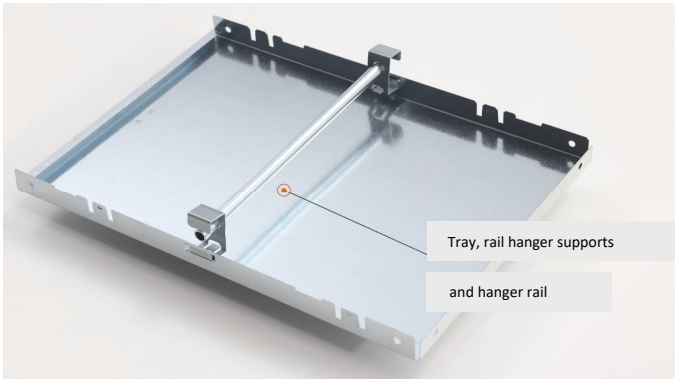

Fit the lower tray with hanger rail.


Insert the rail with its two supports, which fix to the tray by means of the housings provided for this.



Fix the tray to both sides by means of the formed tabs for this purpose.



5 Right and left stops

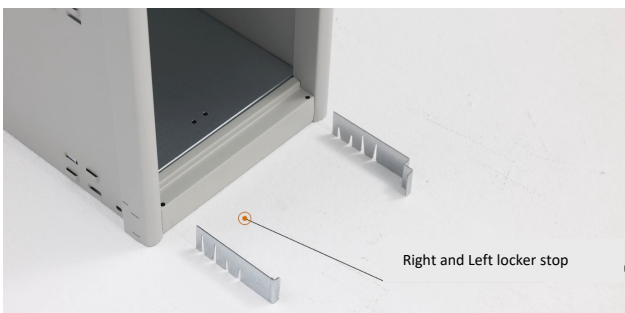

Once the assembly of the locker is completed, fit the left and right stops which give it greater strength and security.



Fit the right stop on the formed tabs of the corresponding side, at the height of the lock. This part functions as a stop when the door is closed, giving it greater strength and rigidity if pushed.

The left stop is fitted by means of the same procedure on the opposite side, also at the height of the lock. It has a blocking function when the door is closed, making the locker more secure.

6 Door





In order to fit the door, first the bottom pin must be inserted and the door fitted on it.





Once the door is fitted on the bottom pin, fit the top pin with spring from inside the locker, push it so it can be inserted in the door hole.

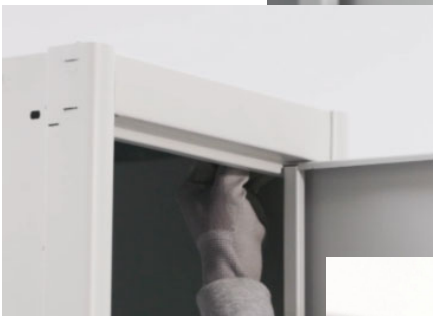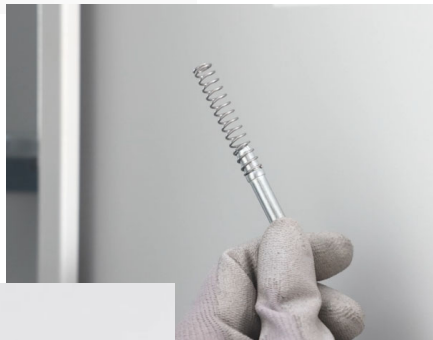

7 Lock




Fit the lock so the contents can be kept under lock and key, to provide better security.


The fitting process is the same for the wardrobe, locker and left-luggage locker functions.





Separate the two parts of the lock in order to insert the cylinder through the central hole of the door.

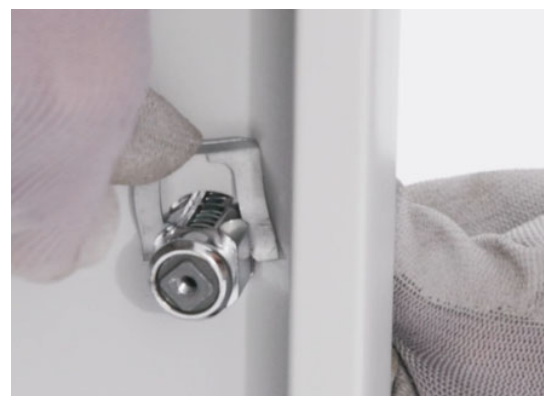

Fit the fork piece from inside the door to prevent the lock being extracted.

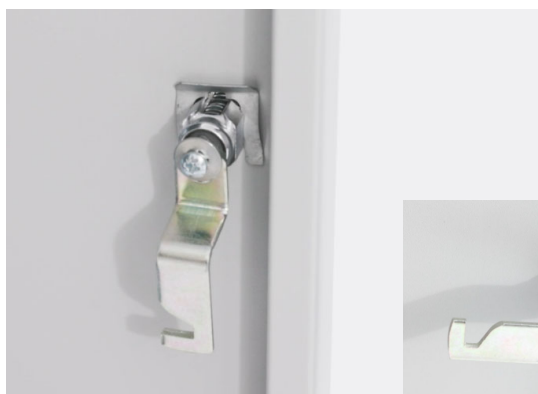

Fit the other part of the lock from inside the door and fasten by means of a screw as shown in the image.



8 Extensions, lockers and left-luggage lockers

To install extension modules, both for the lockers [two doors] and left-luggage lockers [4 doors], the procedure is similar to that indicated for the single-door locker module.





www.esteriasrecord.com

+34 958 466 888

